

FVS19

	10 m ³ /time	18 m ³ /time	27 m ³ /time	HK	kW
Modell	Løftehøyde				
FVS19/06	64	51,6	20,5	5,5	4
FVS19/09	96	77,4	30,8	7,5	5,5
FVS19/12	128	103,2	41	10	7,5
FVS19/16	170,7	137,6	54,7	15	11
FVS19-19	202,7	163,4	65	20	15
FVS19-24	256	206,4	82,1	20	15
FVS19/26	277,3	223,6	88,9	25	18,5
FVS19/30	320	258	102,6	20	18,5
FVS19/32	341,3	275,2	109,4	30	22
FVS19/35	373,3	301	119,7	30	22
FVS19/38	405,3	326,8	126,5	40	30


MEI ≥ 0.10

Tabellen over viser vanlige modeller.
Motorene er normalt lagervare hos oss.

Motor og pumpeende monteres hos
Norsk Pumpeservice AS.


Pumpen leveres både som 230V og 400V

Leveres som 304 rustfritt som standard.
Tilgjengelig i 316

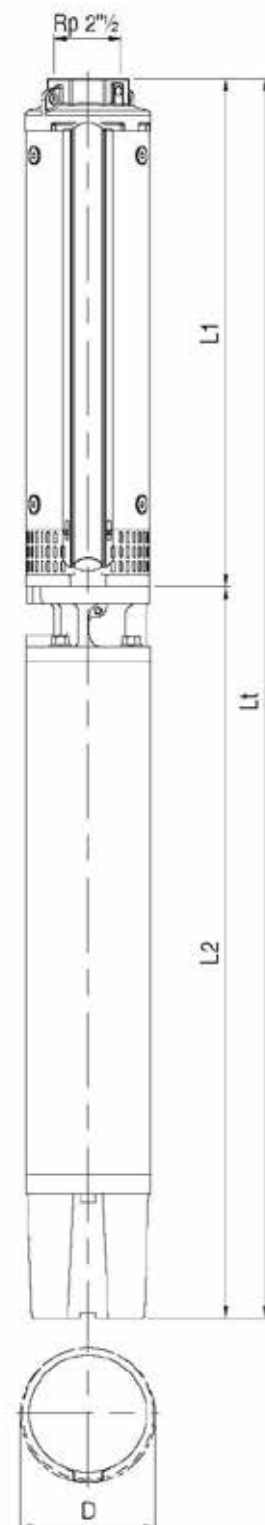

Performance curves 50Hz

MEI ≥ 0,40

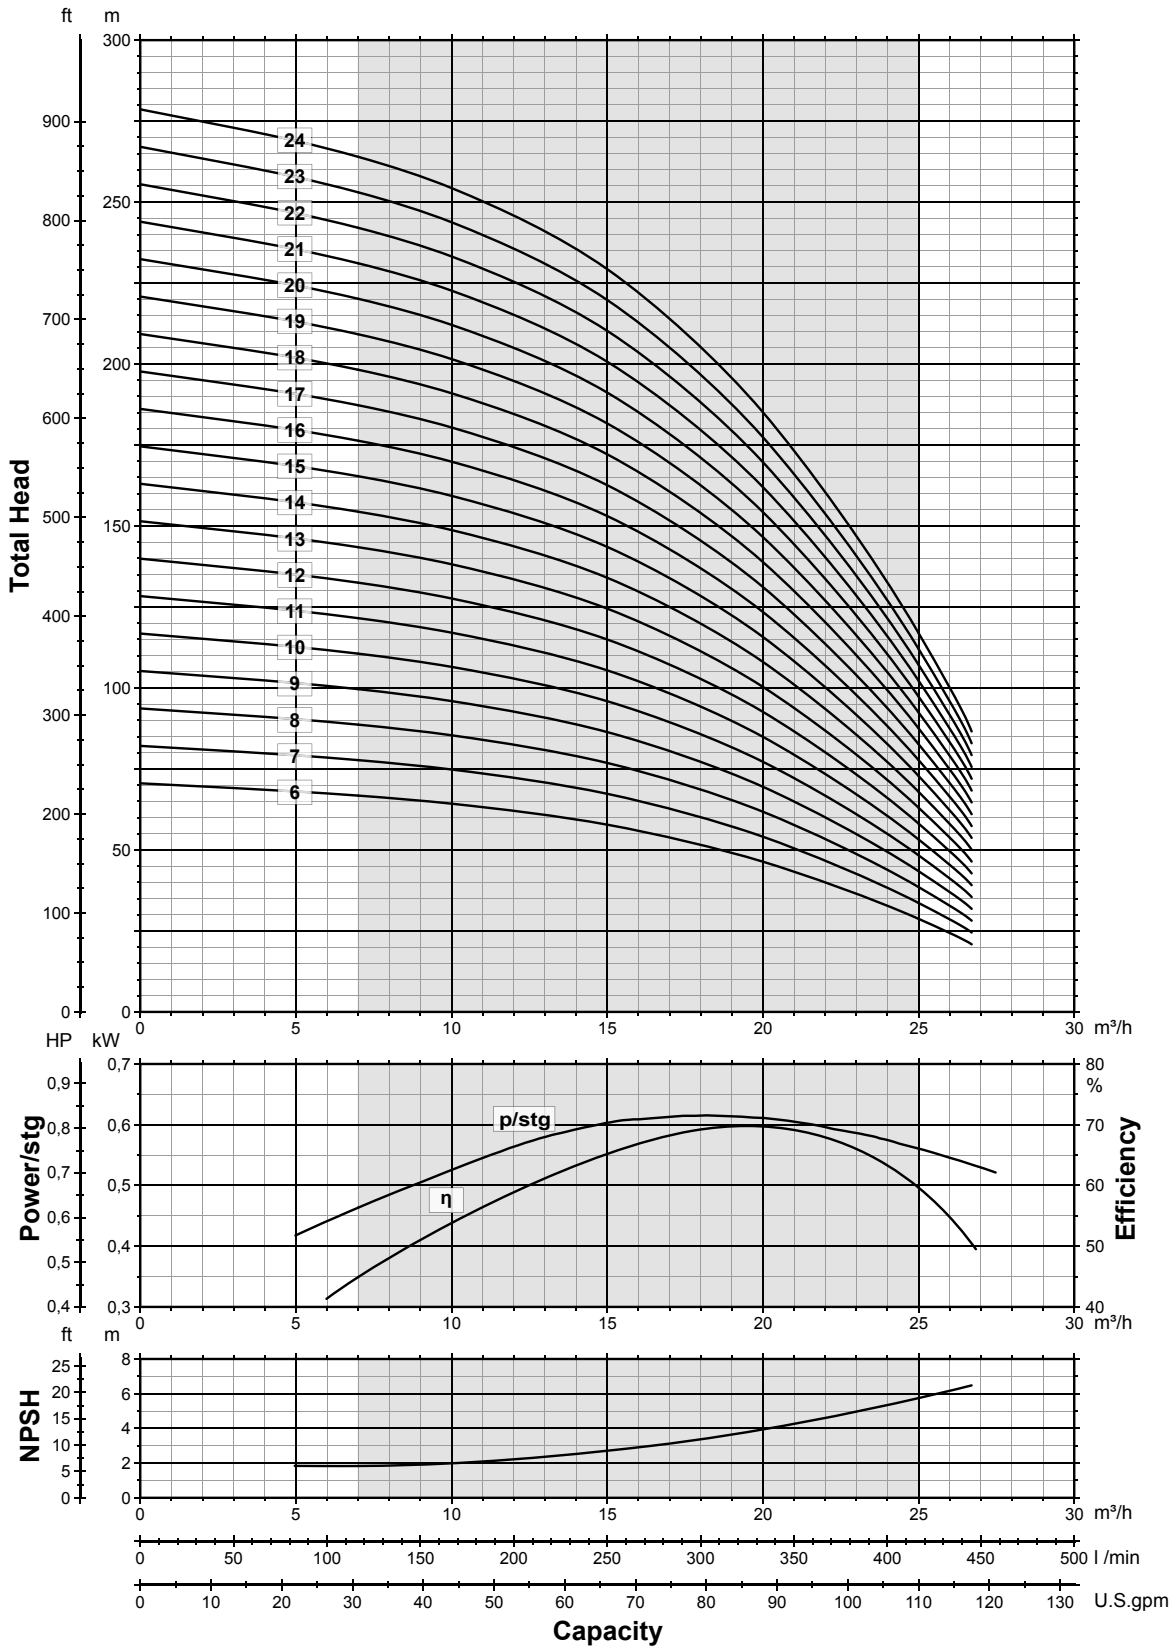

00110067 07/2010