


FVS14

	6 m ³ /time	12 m ³ /time	18 m ³ /time	HK	kW
Modell	Løftehøyde				
FVS14/05	50,7	41,4	18,6	5,5	4
FVS14/08	81,1	66,3	29,7	5,5	4
FVS14/10	101,4	82,9	37,1	7,5	5,5
FVS14/12	121,7	99,5	44,6	7,5	5,5
FVS14/15	152,1	124,3	55,7	10	7,5
FVS14/18	182,5	149,2	66,8	12,5	9,3
FVS14/21	212,9	174	78	12,5	9,3
FVS14/25	253,4	207,2	92,8	15	11
FVS14/28	283,9	232,1	104	15	11
FVS14/31	314,3	256,9	115,1	15	11
FVS14/34	344,7	281,8	126,2	20	15
FVS14/37	375,1	306,6	137,4	25	18,5

MEI ≥ 0.10

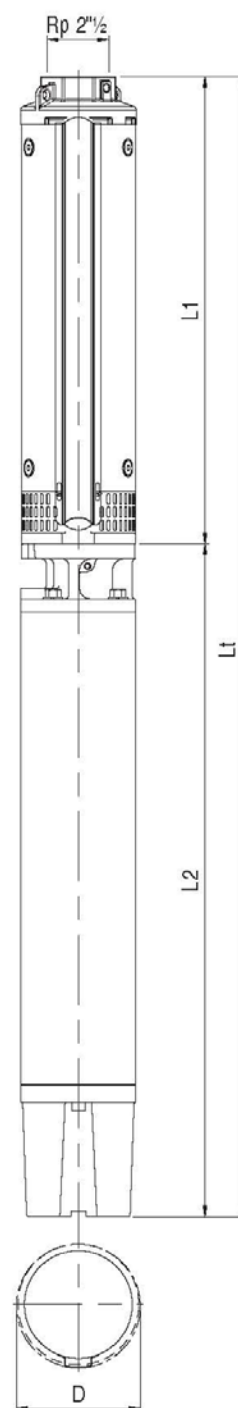

Tabellen over viser vanlige modeller.
Motorene er normalt lagervare hos oss.

Motor og pumpeende monteres hos
Norsk Pumpeservice AS.


Pumpen leveres både som 230V og 400V

Leveres med 304 rustfritt som standard.
Tilgjengelig i 316



Performance curves 50Hz

MEI ≥ 0,10

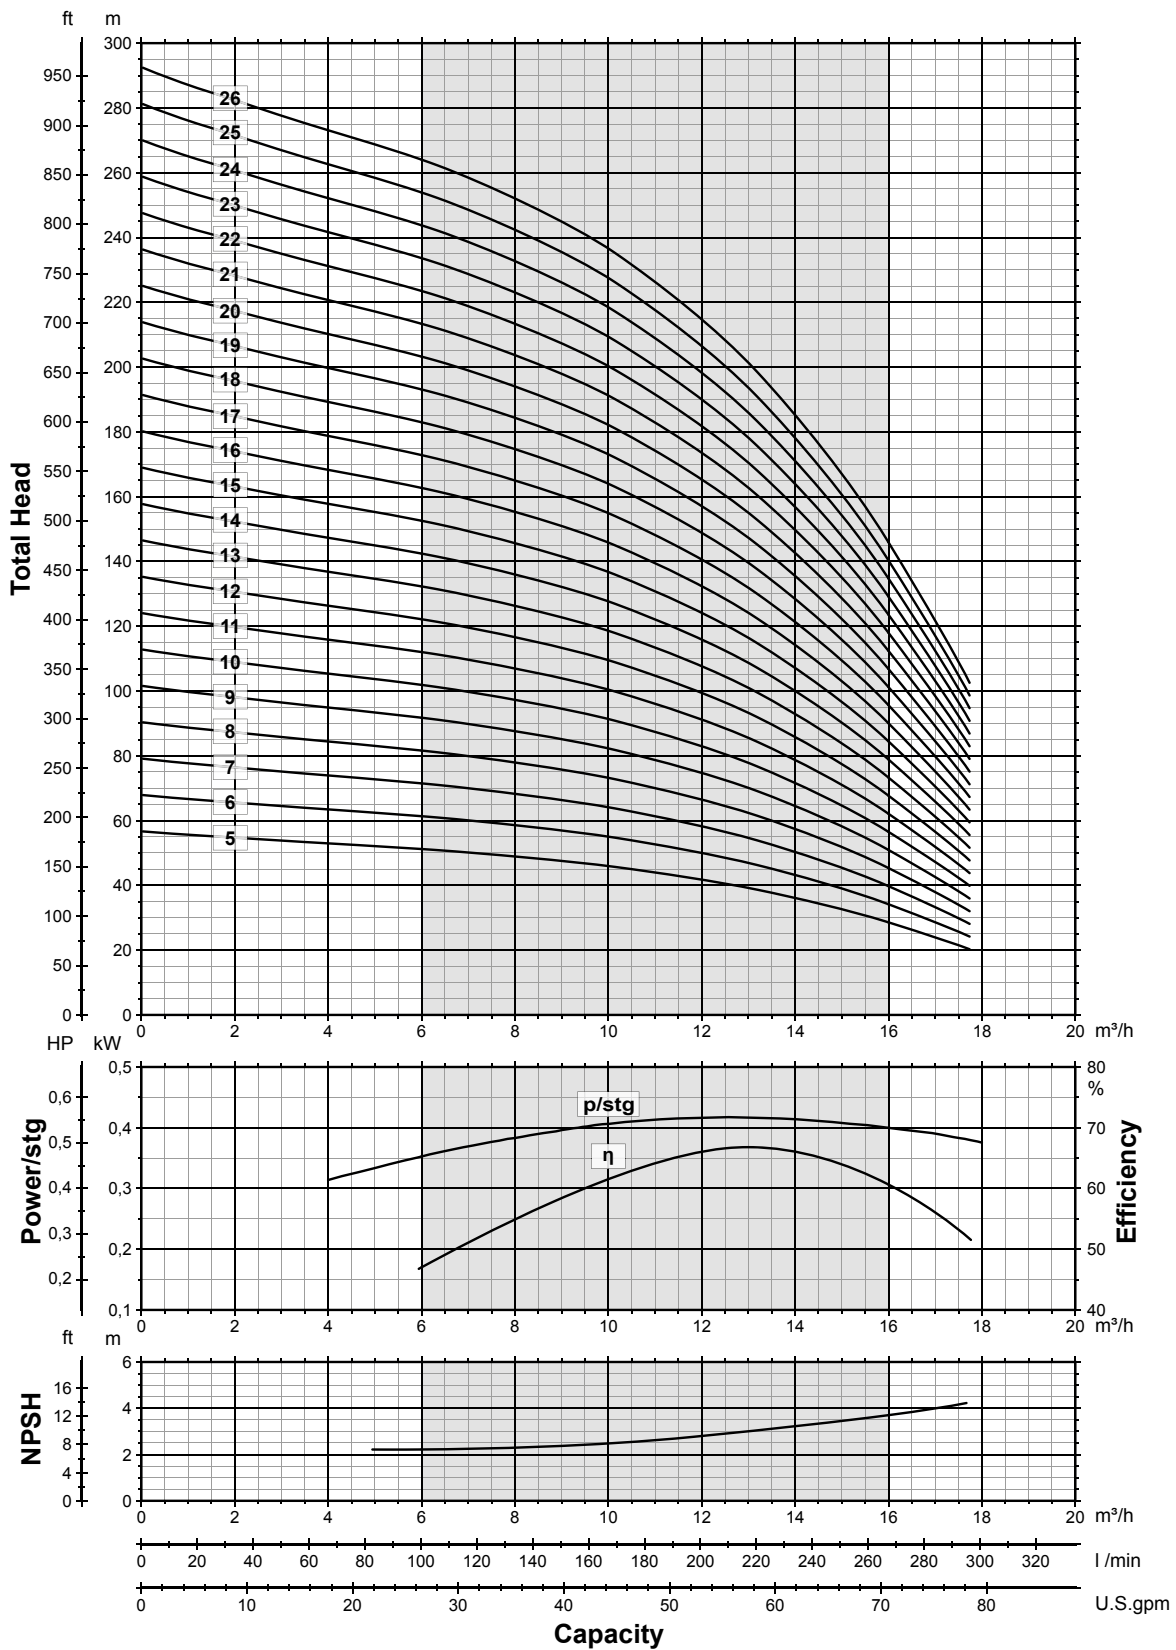

00110067 07/2010



The hydraulic characteristics are guaranteed, according to ISO standard 9906:2012, grade 3B

It is our policy to continuously develop and improve our products, therefore, we reserve the right to amend specifications without prior notice.